

# EMERGENCY LUMINAIRES

## NON-MAINTAINED TYPE - WALL MOUNTED

### Features

- Low power consumption
- Changeover complete in 1 second
- Long lamp life of LED's
- Nickel Cadmium Battery incorporated for emergency backup purpose  
(Ni-MH Battery is available upon request)

### "Golden Star" EL-2W-02



### LED Signal

#### - "Red" LED


Indicates main supply and charger are functioning.

#### - "Green" LED

Indicates main fully charge of battery.

#### - "Yellow" LED

Indicates main the battery is disconnected or failure.

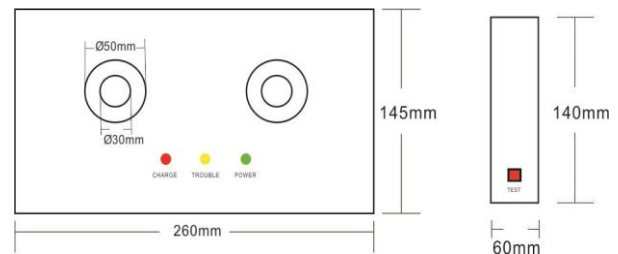

### Standards

- BS 5266-1:2016
- BS EN 60702-1:2002
- BS 6207-3:2001
- BS EN 60702-2:2002
- BS 6387:2013
- FSD PPA/104(A) 4<sup>th</sup> Revision
- BS EN 1838:2013
- IEC 60695-2-10:2013
- BS EN 60598-2-22:2014 (850°C glow wire test)

### Product Specification

Model	EL – 2W – 02
Lamp Type	LED
Luminaires Type	Non - Maintained type
Power Consumption	2 × 3W
Battery	2.4V 600mAh Ni-Cd(Ni-MH is available upon request)
Full Charge Period	12 hours
Emergency Backup Duration	2 hours
Main Supply Voltage	A/C 220V~240V 50Hz +/-10%