


LED EXIT SIGN BOX

MAINTAINED TYPE - SURFACE MOUNTED


Features

- Low power consumption
- Changeover complete in 1 second
- Long lamp life of LED's
- Single / Double Side
- Nickel Cadmium Battery incorporated for emergency backup purpose (Ni-MH Battery is available upon request)

**"Golden Star " ES-2P-01
(Single Side)**

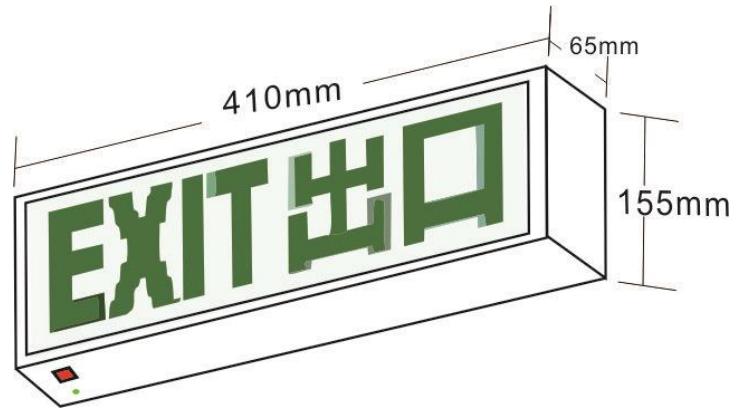

**"Golden Star " ES-2P-01(D)
(Double Side)**

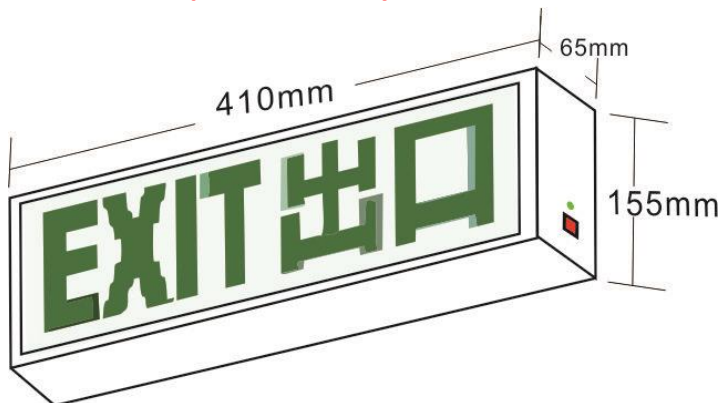

Product Specification

Model	ES - 2P - 01 (Single Side)	ES - 2P - 01(D) (Double Side)
Lamp Type	LED	
Luminaires Type	Maintained type	
Power Consumption	3W	
Battery	3.6V 1000mAh Ni-Cd(Ni-MH is available upon request)	
Full Charge Period	12 hours	
Emergency Backup Duration	3 hours	
Main Supply Voltage	A/C 220V~240V 50Hz +/-10%	

LED EXIT SIGN BOX

MAINTAINED TYPE - SURFACE MOUNTED

The installment of the exit sign box is very easy and simple. It is using LED which is comparatively energy saving.

**"Golden Star " ES-2P-01
(Single Side)**



**"Golden Star " ES-2P-01(D)
(Double Side)**



Ideal for public locations such as industrial, commercial buildings, factories and warehouses.

Standards

- BS 5266-1:2016
- BS 5499-3:1990
- BS 5499-4:2013
- BS 6207-3:2001
- BS 6387:2013
- BS EN 60598-2-22:2014
- BS EN 60702-1:2002
- BS EN 60702-2:2002
- FSD PPA/104(A) 4th Revision
- FSD COP (2012) Clause 5. 10
- IEC 60695-2-10:2013(850°C glow wire test)

Legend

